


COFFRET DE CELLULE DE POLARISATION (PCR)

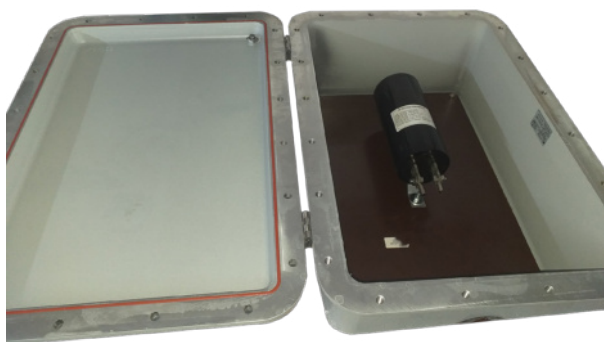

Coffret ADF en aluminium type ATEX II 2GD Ex db IIB+H2 Gb I M2 db I Mb (EJBX) zone 1, 2, 21 22, de dimensions 632 mm x 432 mm x 210 mm. Équipés de cosses, PCR et plaque isolante en bakélite.

Les coffrets seront montés sur un (01) tube en acier galvanisé à chaud Ø 3", coudés à 120° et renforcés par des barres de support galvanisée à chaud, des plaques, des canaux type « C », écrous et boulons type « U »

PERFORMANCES ET CARACTÉRISTIQUES DU PRODUIT :

- Protection contre les surtensions transitoires, transitoires et à long terme.
- Éliminer les courants vagabonds perturbateurs.
- Applicable à divers types de sources d'interférences (tels que les appareils à haute tension, la puissance de traction la fourniture électriques, appareils à basse tension et coups de foudre).
- Mise à la terre CA et isolation CC des équipements électriques dans les systèmes de protection cathodique.


ACCESSOIRES :

- Plaque en bakélite 5 mm réf 4010700500
- Cellule de Polarisation (PCR)
- 02 cosses à étrier pour connexion de câble 1x25 mm²

RÉFÉRENCÉ PAR SONATRACH / TRC ESR, EXL (RTO), ENAC



POLARIZATION CELL KIT (PCR)

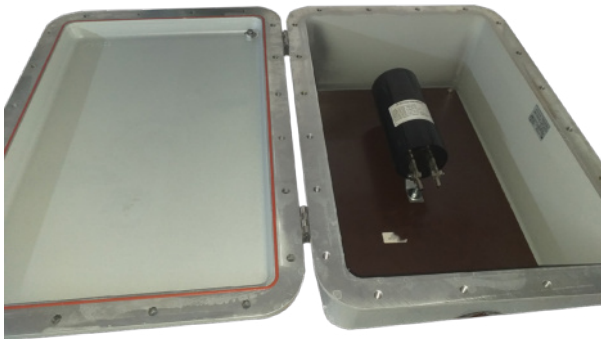

ADF aluminum box type ATEX II 2GD Ex db IIB+H2 Gb I M2 db I Mb (EJBX) zone 1, 2.21 22, dimensions 632 mm x 432 mm x 210 mm. Equipped with lugs, PCR and bakelite insulating plate.

The boxes will be mounted on one (01) hot-dip galvanized steel tube Ø 3", bent at 120° and reinforced with hot-dip galvanized support bars, plates, type "C" channels, type "C" nuts and bolts U"

PRODUCT PERFORMANCE AND CHARACTERISTICS

- Protection against transient, transient and long-term overvoltages.
- Eliminate disturbing stray currents.
- Applicable to various kinds of interference sources (such as high-voltage appliances, traction power, electrical supply, low voltage devices and lightning strikes).
- AC grounding and DC isolation of electrical equipment in cathodic protection systems.

ACCESSOIRES :

- Bakelite plate 5 mm ref 4010700500
- Polarization cell (PCR)
- 02 clamp lugs for 1x25 mm² cable connection